



Xtra Slim LED Video Wall


50" Full HD LED Video Wall

- Rich picture quality with Full HD Resolution for superb image quality
- Long life & environment friendly product
- High lumens efficiency for reducing operating costs
- Browser/Server based architecture for quick monitoring
- Slimmest LED Cube saves real state



50" Full HD LED Video Wall

Delta's LED Video wall is a rear projection, LED based Full HD Video wall that offers environment friendly LED illumination, vivid rich color and true cube redundancy. Industry's first ultra-slim LED based DLP® video wall save user's installation space .

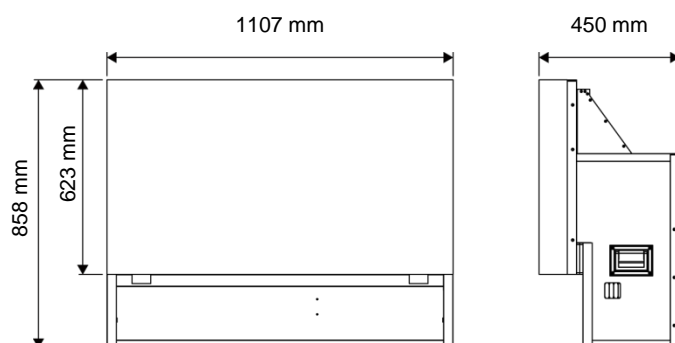

LED Light Source



New Gen. LED Light

Source

Specifications

		DVS-508RSL / DVS-508FSL				
Description		LED Light Source Full HD Cube				
Individual Cube Size		50" Diagonal				
Image Size		1107 x 623 mm				
Display Technology		DLP, single chip				
Native Resolution		1920 x 1080 pixels				
Aspect Ratio		16:9				
Screen to Screen Gap		Rear Access : 0.2mm , Front Access : 1.0 mm				
Light Source		LED				
Brightness Uniformity		Up to 98%*1				
Contrast Ratio		Typ. 1000:1				
Colors		16.7 million				
Color Temperature Range		3200K to 9300K, Custom				
Standard Inputs*3		1x Digital DVI-I, 2x Digital HDMI, 1x Analog D-sub 15pin, 1x Display Port				
Standard Outputs*3		2x Digital HDMI				
Optional Board	I*2	Inputs	1x Digital DVI-D, 1x HDMI, 1x Display port, 1x Analog 5BNC (RGBHV or YPbPr), 1x Analog S-video			
	II*2	Inputs	1x Digital DVI-D, 1x 3G-SDI, 1x Display port 1x Analog 5BNC (RGBHV or YPbPr), 1x Analog S-video			
		Output	1x 3G-SDI			
	III*2	Inputs	1x Digital DVI-D, 1x HD-baseT, 1x Display port 1x Analog 5BNC (RGBHV or YPbPr), 1x Analog S-video			
Control Options		RS-232 / RS 422, IP, IR				
Screen Brightness	Screen Type	Bright mode	Normal mode	ECO mode	Screen Viewing Angle (1/2 Gain)	
	CSI	520 cd/m ²	380 cd/m ²	280 cd/m ²	H: 36°	V: 34°
	WUCS(with front glass)	680 cd/m ²	510 cd/m ²	360 cd/m ²	H: 22°	V: 12°
Light source Average Life		60,000 hours	80,000 hours	100,000 hours		
Power Consumption		210 w	180 w	160 w		
Input Voltage		AC 90-240 V @ 50/60 Hz				
Power Supply		Dual Power supply with Redundancy available as an option				
Redundancy Function		Redundant Digital/RGB input ,Redundant LED with multiple Diodes				
Dimension & Weight		(WxHxD) : 1107 x 858 x 450 mm, Net Weight : Rear CSI = 72 Kg, Front CSI = 93 Kg				
Operating Temperature		5°C ~ 40°C (41°F ~ 104°F)				
Non-Operating Temperature		-20°C ~ 60°C (-4°F ~ 140°F)				
Operating / Storage Humidity		10% ~ 80%, non-condensing				

Note: *1. . Through electrical compensation, *2 Only one of the optional boards can be used with standard input / output board, *3 Change from 2020/3.

※ All specifications are subject to change without prior notice.

Ver:05.2020

Website: www.deltadisplays.eu | Contact Us: info@deltadisplays.eu

