

LED Video Wall


67" UXGA LED Rear Access Video Wall

- Rich picture quality with Full HD Resolution for superb image quality
- Long life & environment friendly product
- High lumens efficiency for reducing operating costs
- Browser/Server based architecture for quick monitoring



67" UXGA LED Rear Access Video Wall

Delta's LED Video wall is a rear projection, LED based UXGA Video wall that offers environment friendly LED illumination, ultra high brightness and true cube redundancy.

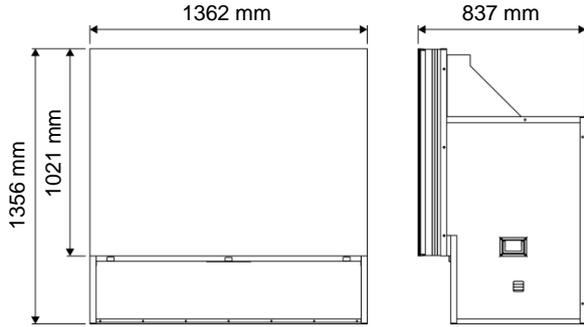

LED Light Source



New LED Gen. Light Source

Specifications

Model		DVS-676RL FS				
Description		LED Light Source UXGA Cube				
Individual Cube Size		67" Diagonal				
Image Size		1362 x 1021 mm				
Display Technology		DLP, single chip				
Native Resolution		1600 x 1200 pixels				
Aspect Ratio		4:3				
Screen to Screen Gap		Adjustable up to 0.2 mm				
Light Source		LED				
Brightness Uniformity		Up to 98% ⁻¹				
Contrast Ratio		Typ. 1000:1				
Colors		16.7 million				
Color Temperature Range		3200K to 9300K, Custom				
Standard Inputs ^{*3}		1x Digital DVI-I, 2x Digital HDMI, 1x Analog D-sub 15pin, 1x Display Port				
Standard Outputs ^{*3}		2x Digital HDMI				
Optional Board	I ²	Inputs	1x Digital DVI-D, 1x HDMI, 1x Display port, 1x Analog 5BNC (RGBHV or YPbPr), 1x Analog S-video			
	II ²	Inputs	1x Digital DVI-D, 1x 3G-SDI, 1x Display port, 1x Analog 5BNC (RGBHV or YPbPr), 1x Analog S-video			
		Output	1x 3G-SDI			
III ²	Inputs	1x Digital DVI-D, 1x HD-baseT, 1x Display port, 1x Analog 5BNC (RGBHV or YPbPr), 1x Analog S-video				
Control Options		RS-232 / RS 422, IP, IR				
Screen Brightness	Screen Type	Bright mode	Normal mode	ECO mode	Screen Viewing Angle (1/2 Gain)	
	CSI	240 cd/m ²	160 cd/m ²	120 cd/m ²	H: 36°	V: 34°
	XMD-AG	250 cd/m ²	170 cd/m ²	130 cd/m ²	H: 31°	V: 17°
Light source Average Life		60,000 hours	80,000 hours	100,000 hours		
Power Consumption		210 w	180 w	160 w		
Input Voltage		AC 90-240 V @ 50/60 hz				
Power Supply		Single Power supply available as an option				
Dimension (W x H x D) & Weight		Dimension : 1362 x 1356 x 837 mm, Net Weight : 120Kg				
Operating Temperature		5°C ~ 40°C (41°F ~ 104°F)				
Non-Operating Temperature		-20°C ~ 60°C (-4°F ~ 140°F)				
Operating / Storage Humidity		10% ~ 90%, non-condensing				

Note: *1. Through electrical compensation, *2 Only one of the optional boards can be used with standard input / output board, *3 Change from 2020/3.

※ All specifications are subject to change without prior notice.

Ver:06.2020